

PosiTector[®] CMM IS


コンクリート水分計 現場用

コンクリート床スラブの
相対湿度と温度を測定

Conforms to

ASTM F2170 準拠

現場用プローブで
コンクリート床スラブの
相対湿度を測定する
標準試験法

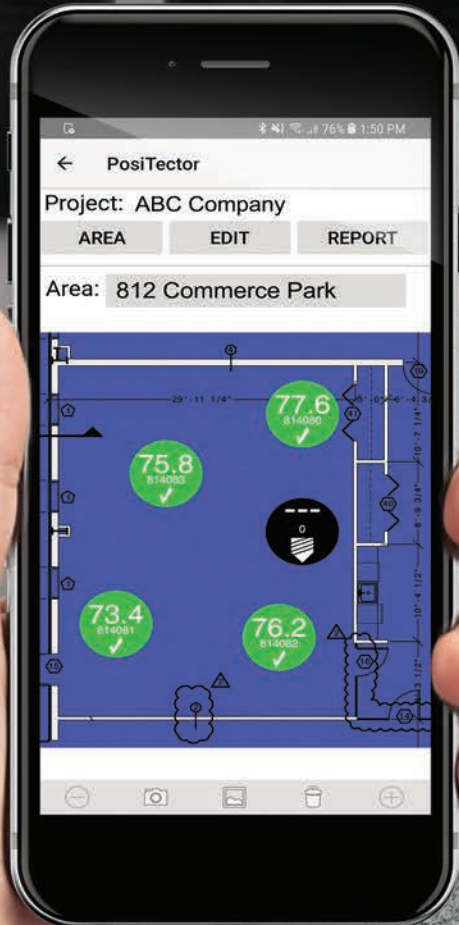

PosiTector App (iOS/Android)と
PosiTector DPM 高機能モデルに
無線接続 Bluetooth[®]

再使用可能な
スマートプローブ



DeFelsko[®]
The Measure of Quality



Available on the
App Store



Bluetooth[®]

PosiTector[®] CMM IS

Concrete Moisture Meter – In Situ Probes

The PosiTector CMM IS probes and free mobile app guide users through the ASTM F2170 documentation criteria. View and record readings directly with your smart device or PosiTector DPM Advanced gage.

Simple

- Easily collect and report measurements in conformance with ASTM F2170
- No need to open the hole or remove the cap to take a measurement. Probes remain powered on and broadcasting via Bluetooth while in situ for up to three weeks.
- Combined sleeve and probe design simplifies the installation process and does not require consumables
- Uses common coin cell batteries

Durable

- Reusable Smart Probes
- Solvent, acid, oil, water and dust resistant—weatherproof
- Two year warranty

Accurate

- Fast response precision sensors provide accurate, repeatable readings
- Cal Check function automatically determines whether a probe is reading within tolerance
- Long Form Certificate of Calibration showing traceability to NIST included with every probe
- Conforms to national and international standards including ISO and ASTM

Powerful

- Fast acclimation, reduced testing time
- Blue LED confirms the probe is powered on and broadcasting
- Includes free PosiTector mobile app for analyzing and reporting data



Calibration Check Chamber and Saturated Salt Solution

- Designed in accordance with ASTM E104 to maintain a constant relative humidity of 75% @ 25° C
- Store and protect the probes in the dedicated Calibration Check Chamber and Saturated Salt Solution when not in use
- Conditions the sensors for faster acclimation

| Specifications | Range | Accuracy | Resolution |
|----------------|---------------|----------|------------|
| Temperature | 0° to 80° C | ± 0.5° C | 0.1° C |
| | 32° to 175° F | ± 1° F | 0.1° F |
| Humidity | 10 to 90% | ± 2%* | 0.1% |
| | > 90% | ± 3%* | |

* 0 – 65° C (32 – 150° F)

For use with the **PosiTector App** and the **PosiTector DPM Advanced**



PosiTector App

An easy-to-use mobile app (iOS/Android) that wirelessly connects to your PosiTector CMM IS Smart Probes.

- Displays the relative humidity and temperature measurements from PosiTector CMM IS probes
- Record the date and time of all measurement steps in accordance with ASTM F2170
- Include a blueprint or image and overlay hole/probe locations
- Automatically generate custom, professional PDF reports with all information required by ASTM F2170

PosiTector DPM Advanced

- Displays and records the relative humidity and temperature measurements from PosiTector CMM IS probes as well as the relative humidity and ambient temperature of the PosiTector DPM probe
- Storage of 100,000 datasets in up to 1,000 batches
- Includes PosiSoft Suite of solutions for analyzing and reporting data

*PosiTector DPM Advanced model included with the Pro Kit



Options

Expansion Packs (1, 4 and 16 packs available) Add additional reusable PosiTector CMM IS Smart Probes as required. Each pack consists of a probe, calibration check chamber, saturated salt solution (NaCl), cap, and A-76/LR-44 coin cell batteries.

Replacement chambers, salt solutions, tools, caps and fins are available upon request



PosiTector CMM IS Pro Kit includes the PosiTector DPM Advanced

| Ordering Guide | Basic Kit CMMISKITB | Complete Kit CMMISKITC | Pro Kit CMMISKITP3-E |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Select from 3 expandable Kits and add additional probes as required</p> | <p>— — —</p> <ul style="list-style-type: none"> ● 3 CMM IS probes ● 3 Saturated Salt Solutions ● 3 Calibration Check Chambers ● 3 Caps ● Extraction Tool ● Tape Measure <p>— — —</p> <ul style="list-style-type: none"> ● Ten A-76/LR-44 coin cell batteries <p>— — —</p> | <p>— — —</p> <ul style="list-style-type: none"> ● 5 CMM IS probes ● 5 Saturated Salt Solutions ● 5 Calibration Check Chambers ● 5 Caps ● Extraction Tool ● Tape Measure ● Vacuum Tool Attachments <ul style="list-style-type: none"> ● Ten A-76/LR-44 coin cell batteries ● Hard shell carrying case | <ul style="list-style-type: none"> ● PosiTector DPM3 Advanced ● 5 CMM IS probes ● 5 Saturated Salt Solutions ● 5 Calibration Check Chambers ● 5 Caps ● Extraction Tool ● Tape Measure ● Vacuum Tool Attachments <ul style="list-style-type: none"> ● Ten A-76/LR-44 coin cell batteries ● Hard shell carrying case |

Conforms to **ASTM F2170 Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs using in situ Probes.**

DeFelsko[®]
Inspection Instruments

DeFelsko Corporation • 800 Proctor Ave., Ogdensburg, New York 13669-2205 USA
Toll Free 1-800-448-3835 • Tel: +1-315-393-4450 • Fax: +1-315-393-8471

www.defelsko.com • E-mail: techsale@defelsko.com

© 2018 DeFelsko Corporation USA. All Rights Reserved. Technical Data subject to change without notice. Printed in USA. CMMIS.v.LW-W1801